


1008-0070...0260,1008(WZ/TSL) TYPE TAILSTOCK

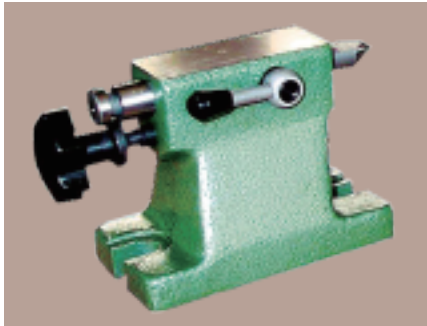


1008(WZ), 1008-0260 (TSL400-2) is designed for use with the vertical rotary tables. The tailstock is used to hold center shaft, cylinders and other workpieces for the machining of grooves, splines, flats, keyways, etc. The center is retractable for repeated operations. Center is securely locked into position with clamp.
 Note: Type 1008-0070(WZ70) tailstock is matched to 1003-0100(TSL100). Type 1008-0260 tailstock is matched to 1003-0400(TSL400). The tailstock for rotary table is special supplied.

Main specifications

Specifications	Items	1008-0070 (WZ70)	1008-0260 (TSL400-2)
Distance between taper center to base mm		70	260
Taper of Center		-	MT3
Width of locating key mm		10	18
Stroke of center mm		12	30
Net weight Kg		2.5	28
Gross weight Kg		3	32
Case dimensions mm		200X120X202	375X355X260

1008-0070...0260,1008(WZ/TSL) Inatallation sketch and dimensions

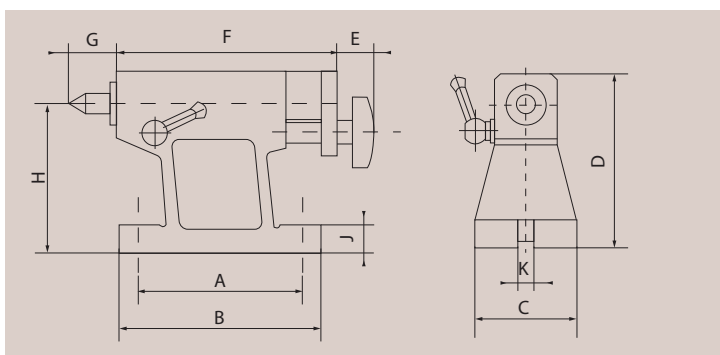

1008-0070,1008(WZ/TSL): Inatallation sketch and dimensions

	A	B	C	D	E	F	G	H	J	K
1008-0070 (WZ70)	43	110	65	67.56	25	69	25	70	12	10
1008-0260 (TSL400-2)	193	225	150	290	40	216	49	260	28	18